


# Product Specifications

## Min/Max Alarm Digital Thermometer

<b>Temperature Range</b>	Internal Sensor: 14°F to 122°F (-10°C to 50°C) External Sensor: -58°F to 158°F (-50°C to 70°C)
<b>Accuracy</b>	±1.0°F (±0.5°C) from -4°F to 122°F (-20°C to 50°C), otherwise ±1.8°F (±1.0°C)
<b>Resolution</b>	0.1°F/°C
<b>Display Reading Update</b>	10 seconds
<b>Sensor</b>	Thermistor
<b>External Sensor Cable Length</b>	10 ft (3m)
<b>Display Window Size</b>	1.9 in. (W) x 0.8 in. (H) (48 mm x 21 mm)
<b>Product Size</b>	2.9 in. (W) x 2 in. (H) x 0.6 in. (D) (73 mm x 52 mm x 15 mm)
<b>Weight</b>	2.5 oz. (70 g)
<b>Body Casing</b>	Polycarbonate and ABS plastic
<b>Probe</b>	Stainless steel probe, 0.875 in. (L) (17.8 mm)
<b>Battery (included)</b>	3V CR 2032
<b>Certification / Calibration</b>	CE mark, N.I.S.T. traceable

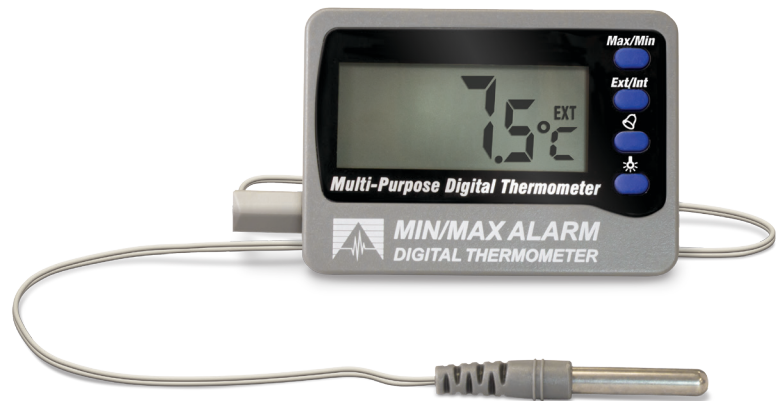

### Model 12207

- High/low temperature alarm setting for external sensor
- Internal/External sensor reading switchable on LCD
- Min/Max memory for internal and external sensor, lowest & highest reading stored for instant recall.
- Detachable external sensor
- °C / °F selectable
- Display backlight
- Foldable stand for placement on flat surfaces
- Mount to vertical surfaces with built-in magnets or Velcro strip (included)
- Mount probe with plastic bracket, or suction cup for glass surfaces (included)

DeltaTrak manufactures products under an ISO 9001:2008 registered quality management system

SS 12207 16K2

