

# GO Real-Time Reusable 4G/5G-LT Tracker

Temperature, humidity, location and security using cellular M2M technology

## Recharge for visibility and protection of extended shipments

GO Real-Time Reusable 4G/5G-LT Tracker is a temperature monitoring solution that does not require fixed installation or hardware maintenance, with continuous coverage for your products over the road. The reusable solution is designed for customers who would like to reuse the same tracker on multiple shipments. And now, the new -LT series tracker is specifically designed for low temperature shipments of frozen goods (down to -30C). With improved location accuracy and ever-expanding 4G/5G global networks, you can rest assured that visibility to your perishable shipments will be available when you need it most.

## Oversight Dashboard. Data at your fingertips

Comprehensive and automated reporting is provided through the Oversight Dashboard and the Oversight Mobile app. Data is encrypted, providing security as it moves to the cloud. Information is at your fingertips while you are on the go with Oversight Mobile. Check status and create shipments direct from a phone or tablet. View current maps, graphs, and charts of key shipments including temperature, humidity, security, and location details. Shipment summary reports include additional details such as device serial number, trip name and duration, mean kinetic temperature, and time above or below range. The Oversight Mobile app is available in English, Chinese, Spanish, Korean, Russian, Italian, German, Portuguese, Turkish and French.



Extended battery life to cover international shipments



Tri-mode CATM (or NBloT)/GSM cellular technology



Global visibility with email/text alerts




Protect your product in-transit and ensure door security



Recycle with GO GreenSense™


## Technical Specifications

<b>Battery:</b>	UN38.3 Compliant
<b>Cellular:</b>	CAT M1/NB1: B1/B2/B3/B4/B5/B8/ B12/B13/B18/B19/B20/B26/B28 EGPRS: 850/900/1800/1900MHz
<b>Certifications:</b>	FCC, IC, CE, PTCRB, RCM, ANATEL, MIC, MOC, INDOTEL, CONATEL, RTCA/DO-160G Compliant
<b>Device Storage:</b>	Optimal: Below 20°C and 60% RH
<b>In-Use Life:</b>	Tri-mode with up to 20 days of operation, 6-minute measurements reported at 18-minute intervals
<b>IP Rating:</b>	IP44
<b>Light Sensor Sensitivity:</b>	±0.5 Lux, minimum detectable 1.0 Lux
<b>Oversight Dashboard:</b>	Emerson.com/Oversight
<b>Recycle Options:</b>	GO GreenSense™ program
<b>Shelf Life:</b>	Shipped with a minimum in-use and shelf life of approximately 6 months. Please check the “Activate By Date” on the product box and follow a first-in-first out process.
<b>Size:</b>	3.2 in x 2.5 in x 1.2 inch (80 mm x 63 mm x 28 mm)
<b>Temperature Range:</b>	-30°C to 60°C (-22°F to 140°F) operating environment
<b>Temperature Accuracy:</b>	±0.5°C (0.9°F) typical between -20°C to 60°C (-4°F to 140°F)
<b>Weight:</b>	0.3 lbs (140 g)

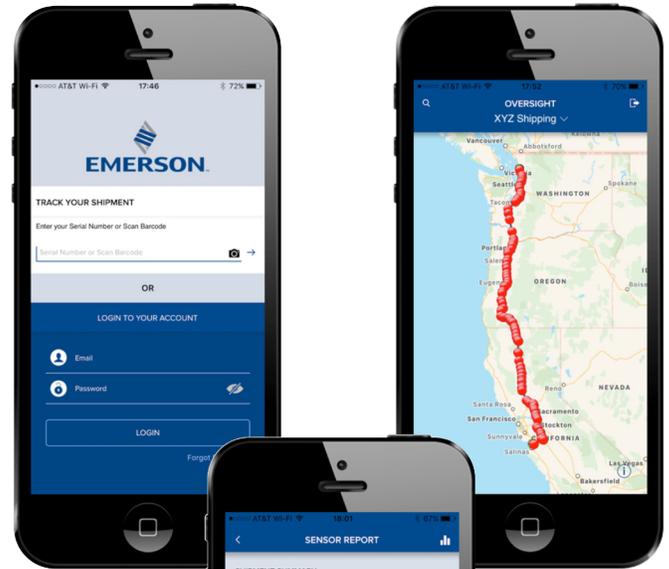

Oversight Mobile  
Login

Oversight Mobile  
Map Detail

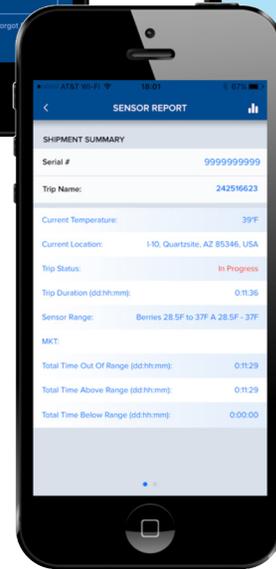

Oversight Mobile  
Summary Report



Download the  
Oversight Mobile App

NOTE: Accessories - Charging cables and power port sold separately

### Contact Information

0755-84200058

Sales@eofirm.com